





UNI 5739 | EN ISO 4017* | DIN 933

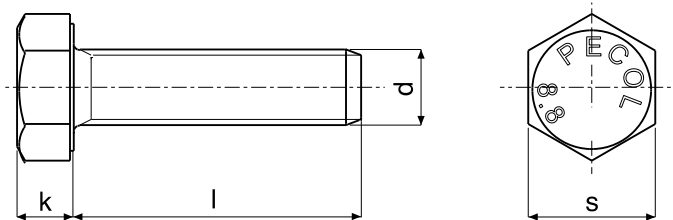

Aço 6.8; 8.8; 10.9; Inox A2; A4;
Steel 6.8; 8.8; 10.9; Stainless Steel A2; A4;
Acero 6.8; 8.8; 10.9; Acero Inoxidable A2; A4;
Acier 6.8; 8.8; 10.9; Acier Inoxydable A2; A4;
Acciaio 6.8; 8.8; 10.9; Acciaio Inossidabile A2; A4;

Na versão EN ISO 4017 o diâmetro: 10, 12, 14, 22 varia unicamente na dimensão s | *In the version EN ISO 4017 diameters: 10,12,14, 22 differ only for the dimension s* | *En la version EN ISO 4017 en los diámetros 10,12, 14 y 22 sólo se diferencian de las dimensiones s* | *Dans la version EN ISO 4017 les diamètres : 10, 12, 14, 22 varient uniquement selon la valeur s* | *Nella versione EN ISO 4017 i diametri: 10,12,14, 22 variano unicamente per il valore s*

Parafuso cabeça sextavada rosca métrica e total

Hexagon bolt metric coarse, pitch thread | Tornillos de cabeza hexagonal, totalmente roscados | Vis à tête hexagonale filetage métrique total, pas large | Viti a testa esagonale con gambo interamente filettato

D	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20	M22	M24	M27	M30	M36	M42
P (1)	0.7	0.8	1	1.25	1.5	1.75	2	2	2.5	2.5	2.5	3	3	3.5	4	4.5
sDIN-UNI	7	8	10	13	17	19	22	24	27	30	32	36	41	46	55	65
s* EN ISO	-	-	-	-	16	18	21	-	-	-	34	-	-	-	-	-
K	2.8	3.5	4	5.3	6.4	7.5	8.8	10	11.5	12.5	14	15	17	18.7	22.5	26
l (mm)	peso/ weight/ peso/ poids/ peso - 1000pc/Kg															
8	1.49	2.38	3.74	8.5	15.2											
10	1.64	2.63	4.08	9.10	16.2	23.3	38.0									
12	1.80	2.87	4.42	9.80	17.2	25.0	40.0	52.9								
14	1.95	3.12	4.76	10.5	18.2	26.4	42.0	55.6								
16	2.10	3.37	5.11	11.1	19.2	27.2	44.0	58.3	82.0	105	133	173				
18	2.25	3.62	5.45	11.7	20.2	29.1	46.0	60.9	84.9	110	137	178				
20	2.41	3.87	5.80	12.3	21.1	31.0	48.0	63.5	87.2	114	143	184				
22	2.56	4.12	6.15	12.9	22.2	33.0	50.0	66.2	92.2	119	148	190	269			
25	2.80	4.49	6.65	13.9	23.7	34.1	53.0	70.2	95.8	124	155	199	280			
28	3.04	4.86	7.15	14.9	25.2	36.2	55.9	74.2	100	129	161	200	292			
30	3.19	5.11	7.51	15.5	26.2	37.7	57.9	79.9	104	134	168	214	310			
35	3.57	5.73	8.37	17.1	28.7	41.3	62.9	83.5	112	145	181	229	319	424	670	
40	3.96	6.35	9.23	18.7	31.2	44.9	67.9	90.2	120	155	193	244	338	448	714	1090
45	4.34	6.99	10.1	20.3	33.7	48.5	72.9	97.1	128	165	206	259	358	472	748	1130
50	4.73	7.59	11.0	21.8	36.2	52.0	77.9	103	136	176	219	274	377	496	783	1180
55	5.12	8.21	11.9	23.4	38.7	55.6	82.8	110	145	186	232	289	397	519	817	1230
60	5.50	8.83	12.7	25.0	41.3	58.2	87.8	117	153	196	244	304	416	543	851	1270
65	5.89	9.45	13.6	26.6	43.8	62.8	92.8	123	161	207	257	319	435	566	886	1310
70	6.28	10.1	14.4	28.2	46.3	66.4	97.9	130	169	217	269	334	454	590	910	1370
75		10.7	15.3	29.8	48.8	70.0	102	137	177	227	282	348	473	614	950	1410
80		11.3	16.2	31.4	51.3	73.6	107	144	186	238	295	363	492	637	990	1460
90				34.6	56.3	80.8	117	157	202	258	321	393	531	685	1060	1550
100				37.7	61.3	88.0	127	170	218	279	346	423	569	732	1140	1650
110				40.9	66.4	95.2		184	235	300	371		608	779	1200	1740
120					71.4	80.8		197		320	397		647	827	1260	1840
130						84.4		215		340			685	874	1330	1930
140								224					724	921	1400	2020
150								237					762	969	1470	2120
160								250					801	1010	1450	2210
180													875	1110	1680	2400
200													947	1210	1810	2590

Outras medidas sob consulta | Other measures upon request | Otras medidas solo bajo encargo | Autres mesures sur demande | Altre misure a richiesta
P (1) passo de rosca | thread pitch | paso de rosca | pas filetage | passo del filetto

Vários acabamentos. Peça-nos mais informações. | Surface treatment. Please ask us for more information. | Acabamientos variados. Pídenos más información. | Plusieurs finitions. Contactez-nous pour plus d'information. | Ricopertura di superficie. A richiesta.



peças, pieces, piezas, pièces, pezzi